

Non Clogging Spray Nozzles

Hollow Cone Spray Nozzles



Features




- A Hollow cone spray (Wide angle 90o - 120°) Uniform Flow distribution. No parts inside (Reduce clogging design)

Application

- Cooling
- Humidification
- Spraying of Chemicals AHU,
- Aeration Pre-treatment (Painting)

Size & Material

- Size : 1/2" & 3/4" Female PT
- Material : Moplen EP 400L Polypropylene Impact Copolymer Resin
- Max. operating temperature : 90°C

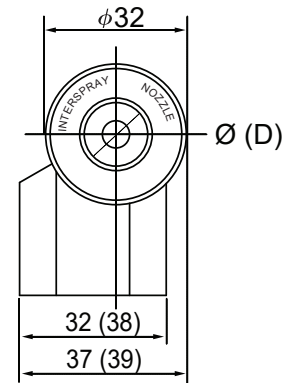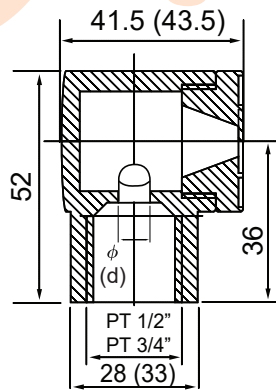

Model		Orifice Ø(D)	Spray angle			Pressure (bar) Spray Capacity (l/min)										Mean Drop. Dia. (µm)
			0.5	2.0	5.0	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	
CHDH	CHDH-12 NN	12	109°	112°	115°	7.8	11.0	13.5	15.6	17.4	19.1	20.6	22.1	23.4	24.7	550~690
	CHDH-14 QQ	14	100°	102°	107°	15	21.2	26.0	30.0	33.5	36.7	39.7	42.4	45.0	47.4	
	CHDH-16 TT	16	93°	100°	106°	29.0	41.0	50.2	58.0	64.8	71.0	76.7	82.0	87.0	91.7	