

Non Clogging Spray Nozzles

Hollow Cone Spray Nozzles



Features




- Clogging - Resistant design. Body with out & whirler (No mechanical part inside)

Application

- Paint process pretreatment
- Washing booths.
- Cooling spraying water in cooling tower.

Size & Material

- Size : 3/8"Female PT
- Material : Moplen EP 400L Polypropylene Impact Copolymer Resin
- Max. operating temperature : 90°C

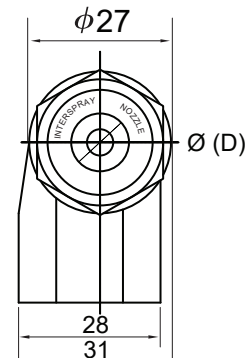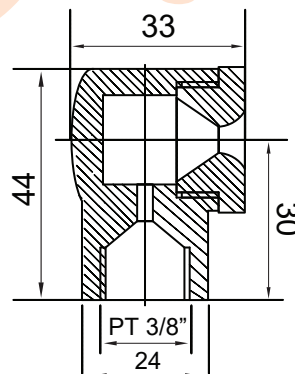

Model		Orifice Ø(D)	Spray angle			Pressure (bar) Spray Capacity (l/min)										Mean Drop. Dia. (µm)
			0.5	2.0	5.0	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	
NHFB	NHFB-7 LL	7	128°	128°	128°	2.7	3.7	4.6	5.3	5.9	6.5	7.0	7.5	8.0	8.4	400~480
	NHFB-6 QQ	6	112°	112°	112°	7.4	10.4	12.7	14.7	16.4	18.0	19.4	20.8	22.1	23.2	
	NHFB-9 QQ	9	118°	118°	118°	12.4	17.5	21.5	24.8	27.7	30.4	32.8	35.1	37.2	39.2	