


Adjustable spray wash gun for Food Industry

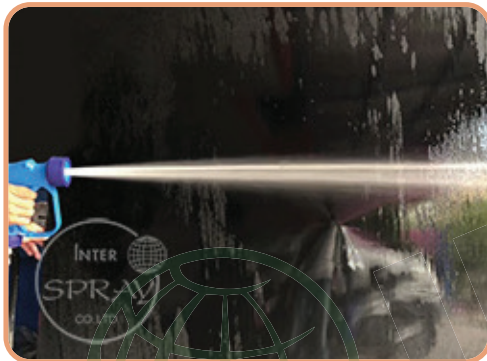


Features

- Low pressure gun with conical/pencil jet controlled by the trigger.
- Adjustable screw to vary cone width from 0 - 60°
- Covered by semi-housings of non-stainable shockproof plastic, entirely sealed and with 3 rubber protective rings.
- Plastic trigger protected by hand guard.
- Minimum fatigue for trigger opening and use.
- Internal stricture in brass and Sst
- Ergonomic construction
- On request, inlet swivel connection.

Specifications

- Product : Italy
- Operation : 3-24 Bar - 2.4 MPa
- Thread : 1/2 Female
- Flow : 60 L/min
- Piston Material : Ottone
- Seals Material : Viton

****Hot Water Operation max temperature 90°C**

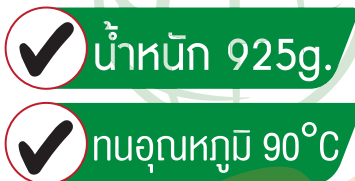

Application

Cleaning

Washing



DOUBLE ACTION TRIGGER
OPERATION WATER JET

DIMENSIONAL DRAWING AND PRESSURE-FLOW CHART

